

# Ambu® aScope™ 3 Slim 3.8/1.2

The ultra slim single-use flexible videoscope



## Key Benefits

- **Instant accessibility**  
Always at hand when needed, saving valuable time and enhancing patient airway safety.
- **High degree of usability**  
The portable, plug and play system is easy to transport and set up. It is ready for use in no time.
- **Cost efficiency**  
Eliminates repair costs as well as any limitations caused by complex reprocessing.
- **No risk of cross-contamination**  
Sterility straight from the pack reduces the risk of cross-contamination.

## Ambu® aScope™ 3 Slim 3.8/1.2

### Challenging conventions

Insufficient availability of equipment for management of the difficult airway in the OR, ER and ICU was considered among the major causative factors contributing to poor patient outcomes in the NAP4 Audit<sup>1</sup> conducted in the UK.

### Intubation made easy – in the OR and ER

aScope 3 Slim is an ultra slim, single-use, flexible videoscope that once and for all solves the problem of accessibility, simplifies set-up procedures and eliminates the need for complex cleaning procedures thus releasing valuable resources for other procedures.

With its small outer diameter, aScope 3 Slim is an alternative to reusable scopes as it is suitable for a wide range of

endoscopic procedures: from intubation to the placement and control of double lumen tubes and bronchial blockers in the OR. The ultra slim design makes the aScope 3 Slim ideal for placing an ET tube  $\geq 5$  mm or a DLT  $\geq$  size 37 Fr.

When connected to the portable monitor, Ambu® aView™, a high-resolution image enables easy navigation and fast identification of anatomical landmarks.

### Enabling you to provide the best care

By switching to the single-use aScope 3 Slim you enhance patient safety by ensuring immediate access to a flexible videoscope and increasing opportunities for training of flexible optical intubation.


<sup>1</sup>Cook T et al., NAP4 – 4th National Audit Project of The Royal College of Anaesthetists and The Difficult Airway Society, Major complications of airway management in the United Kingdom, Report and findings, March 2011

# Specifications

Optical system	
Field of View	85°
Direction of View	0° (forward viewing)
Depth of Field	8-19 mm
Illumination method	LED
Insertion portion	
Bending section	130° up, 130° down°
Insertion cord diameter	3.8 mm (0.15")
Distal end diameter	4.2 mm (0.16")
Maximum diameter of insertion portion	4.3 mm (0.17")
Minimum endotracheal tube size (inner diameter)	5.0 mm
Minimum double lumen tube size (inner diameter)	37 Fr
Working length	600 mm (23.6")
Channel	
Average inner diameter	1.2 mm (0.047")
Minimum instrument channel width	1.2 mm (0.047")
Suction connector	
Connecting tube inner diameter range	Ø7mm +/- 1mm
Operating environment, storage & transportation	
Temperature	10 ~ 40° C (50 to 104° F)
Relative humidity	30 ~ 85%
Atmospheric pressure	80 ~ 109 kPa
Altitude	≤2000m
Sterilisation	
Method of sterilisation	EtO



Ambu® aScope™ 3 Slim  
and Ambu® aView™

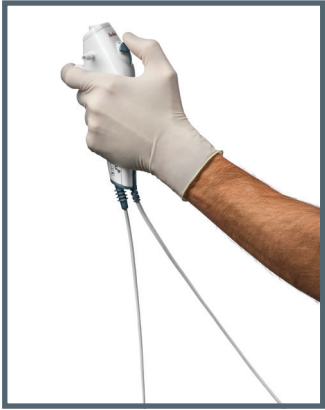


Ergonomic and lightweight  
handle designed for optimal  
user comfort

# Ordering specifications

Item no.	Quantity (Ambu® aScope™ 3 Slim 3.8/1.2)
402001000	5

## Introducer

To facilitate introduction of Luer Lock  
syringes and soft endoscopic accessories  
through working channel

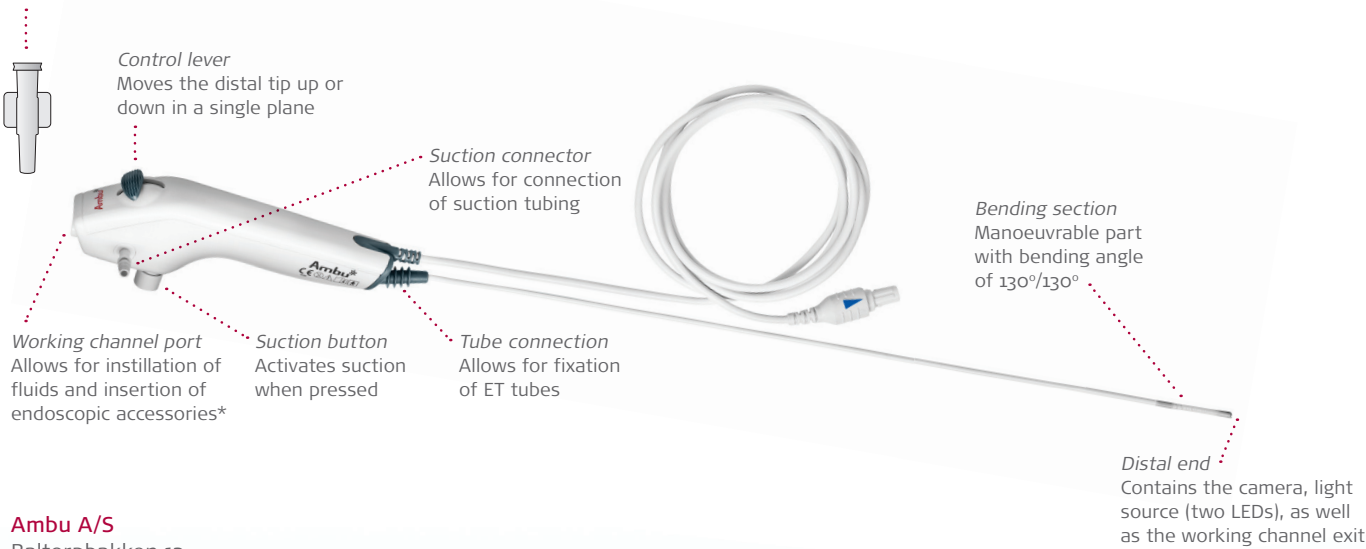

**Ambu A/S**  
Baltorpbakken 13  
DK - 2750 Ballerup  
Denmark  
Tel. +45 7225 2000  
Fax +45 7225 2053  
www.ambu.com

\*There is no guarantee that accessories selected solely using this minimum instrument channel width will be compatible in combination.